

## KS12-7.2 (12V 7.2AH)

### Specification

Nominal Voltage	12V	
Nominal Capacity(20HR)	7.2AH	
Dimensions	Length	151±2mm (5.95 inches)
	Width	65±1mm (2.56 inches)
	Container Height	93.5±1mm (3.68 inches)
	Total Height (with Terminal)	99±1mm (3.90 inches)
Approx Weight	Approx 1.90 kg	
Terminal	T1 / T2	
Container Material	ABS	
Rated Capacity	7.20 AH/0.36A	(20hr ,1.80V/cell,25 °C/77°F)
	6.72 AH/0.672A	(10hr,1.80V/cell,25 °C/77°F)
	6.00 AH/1.20A	(5hr,1.75V/cell,25 °C/77°F)
	5.25 AH/1.75A	(3hr,1.75V/cell,25 °C/77°F)
	4.38 AH/4.35A	(1hr,1.60V/cell,25 °C/77°F)
Max. Discharge Current	108A (5s)	
Internal Resistance	Approx 18m Ω	
Operating Temp.Range	Discharge :	-15 ~50°C (5 ~122°F)
	Charge :	0 ~40°C (32 ~104°F)
	Storage :	-15 ~40°C (5 ~104°F)
Nominal Operating Temp. Range	25 ±3°C (77 ±5°F)	
Cycle Use	Initial Charging Current less than 2.16A.Voltage	
	14.4V~15.0V at 25°C (77°F)Temp. Coefficient -30mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	13.5V~13.8V at 25°C (77°F)Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	KEY POWER batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



### Applications








- ◆ All purpose
- ◆ Uninterruptable Power Supply(UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto controlsystem

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	16.5	12.0	10.25	8.70	6.35	4.65	3.70	2.20	1.64	1.33	1.13	0.98	0.778	0.644	0.353
1.80V/cell	19.8	14.0	11.6	9.46	6.84	4.93	3.94	2.30	1.71	1.39	1.17	1.02	0.806	0.672	0.360
1.75V/cell	22.1	15.3	12.4	9.98	7.12	5.14	4.09	2.38	1.75	1.42	1.20	1.03	0.818	0.682	0.367
1.70V/cell	24.1	16.4	13.1	10.5	7.39	5.27	4.17	2.43	1.80	1.45	1.22	1.06	0.835	0.692	0.372
1.65V/cell	26.2	17.3	13.8	10.9	7.65	5.43	4.28	2.47	1.82	1.47	1.24	1.07	0.846	0.699	0.375
1.60V/cell	27.6	18.1	14.2	11.2	7.86	5.58	4.38	2.53	1.86	1.50	1.26	1.09	0.860	0.709	0.382

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	31.1	22.9	19.7	16.9	12.4	9.11	7.29	4.35	3.26	2.66	2.26	1.96	1.56	1.30	0.713
1.80V/cell	37.0	26.5	22.1	18.2	13.3	9.64	7.74	4.55	3.39	2.77	2.34	2.03	1.61	1.35	0.724
1.75V/cell	41.0	28.8	23.5	19.1	13.8	10.00	8.01	4.68	3.46	2.82	2.38	2.06	1.63	1.37	0.736
1.70V/cell	44.0	30.3	24.6	19.8	14.2	10.18	8.10	4.74	3.52	2.85	2.41	2.09	1.65	1.37	0.739
1.65V/cell	47.0	31.6	25.5	20.4	14.5	10.4	8.25	4.79	3.55	2.88	2.43	2.10	1.66	1.38	0.740
1.60V/cell	48.3	32.4	25.8	20.7	14.7	10.6	8.36	4.86	3.60	2.91	2.46	2.13	1.68	1.39	0.749

### T2 Terminal

Unit: mm [inches]

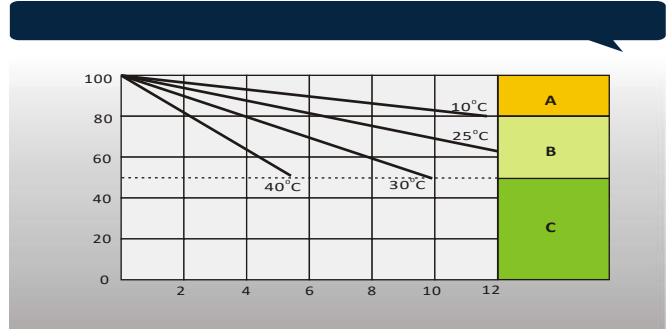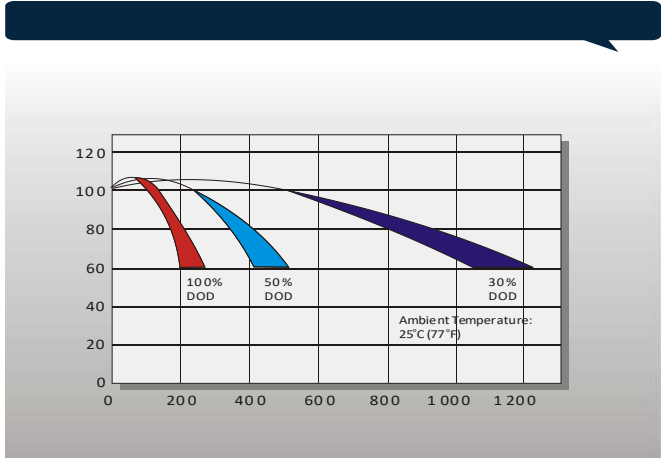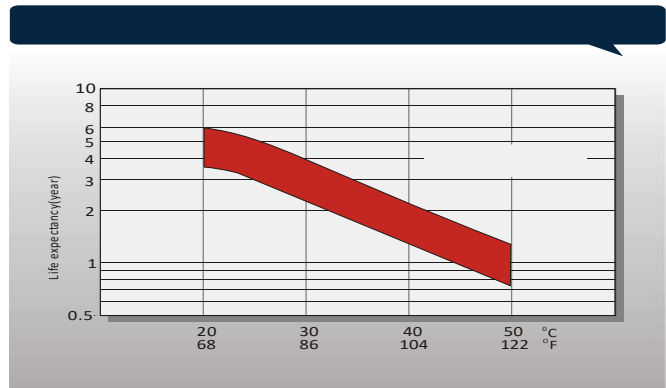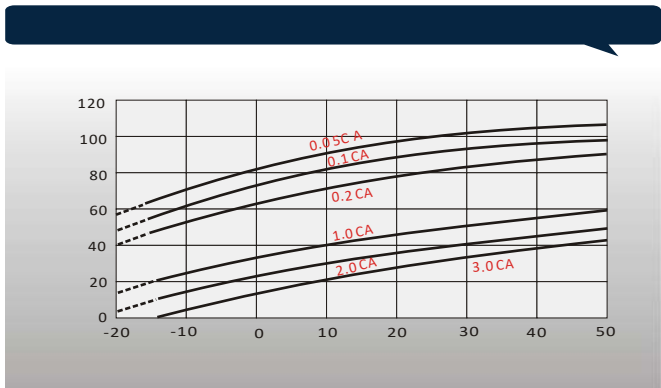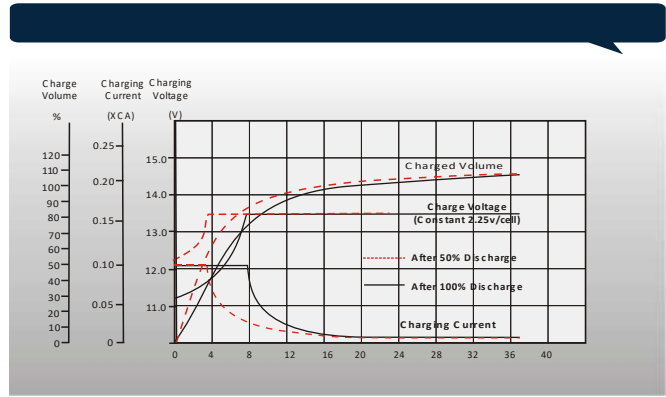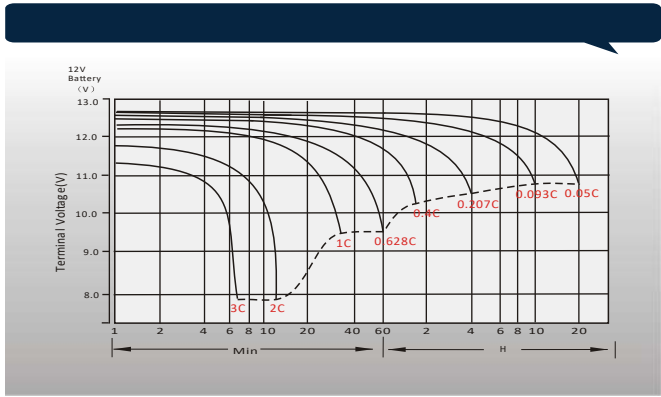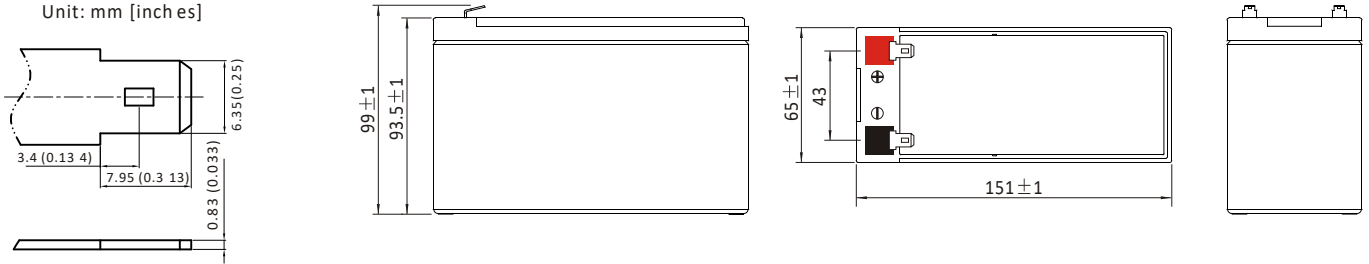

- A** No supplementary charge required  
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:  
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.  
3. Charged for 8~10 hours at limited current 0.05 CA.
- C** Supplementary charge may often fail to recover the capacity.  
The battery should never be left standing till this is reached.